


Rowperfect


Chain Idler

Remove the main frame from main bar.

When the machine is upside down check the chain is on the chain idler pulley. If the chain has skipped off the pulley it can restrict handle recoil. **(PIC 1&2)**

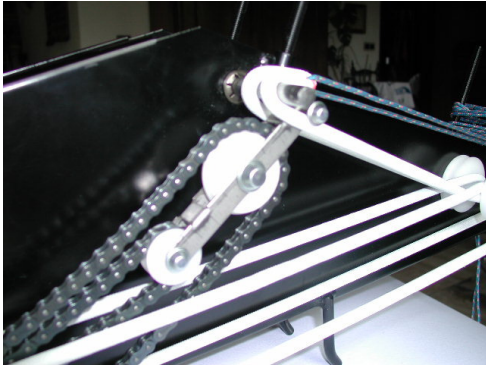


(1)

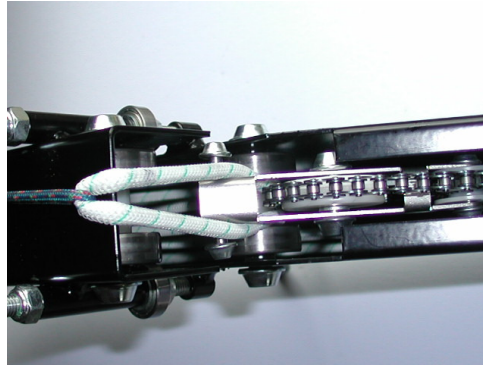

(2)

Shock Cord Tensioning

At the rear of the main frame, push the tails of the shock cord under the rollers to keep them in place. **(PIC 3)** The end of the shock cord then should be flush with the end of the main frame.

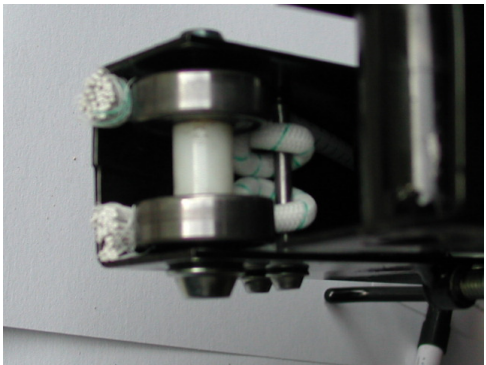

(3)

Then put tension on the shock cord by pulling the loose ends of the shock cord past the end of the frame. Adjust each end evenly. You will only need 1-2 inches either side. Only cut the excess off when you are happy with the tension of the recoil.

If too much adjustment is made the last 1/2 of the arm draw will feel harder. This indicates the shock cord has lost the required elastic properties and requires replacement.